
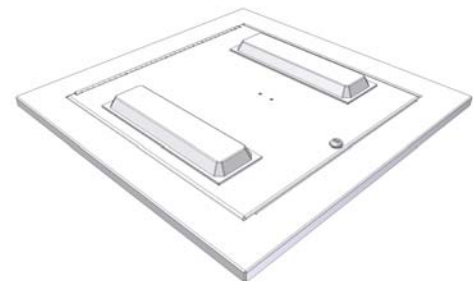


Model 1059-MIMO

Suspended Ceiling Enclosure

The Model 1059-MIMO wireless LAN access point enclosure is a locking 2' x 2' ceiling tile enclosure designed specifically for the Extreme Networks Altitude 4620 dual radio 802.11n access point. This aesthetic, white powder coated steel enclosure has mounting features on the door for attachment of two dual band MIMO antennas. The installation is secure, aesthetic and convenient. The Model 1059-MIMO is designed for installation in the air-handling space. No ceiling tile cuts are required for installation.

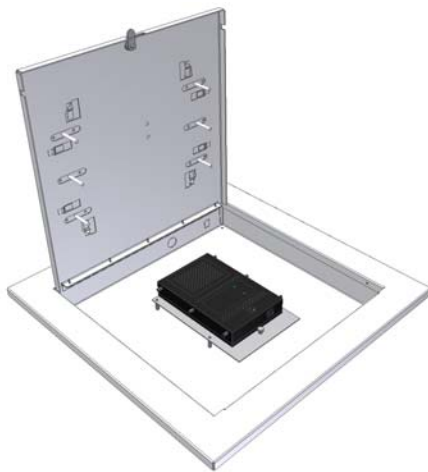

Model 1059-MIMO shown with Extreme Networks 4620 access point and 2 MIMO dual band antennas (not included)

Specifications:

- Ceiling tile enclosure specifically designed for Extreme Networks 4620 access point w/ connectors
- UL50 listed and designed to meet NEC300-22 and 300-23 for plenum installations
- OSHPD approved OPA # 1638
- Mounting features on the door for two dual band 802.11n antennas (P/N 34-MIMO dual band 802.11n MIMO antenna, 3 X 36" pigtailed with RP-SMA connectors)
- Construction: Textured white powder-coated steel, 16 ga. backbox, 14 ga. door
- Fully hinged locking door, keyed alike
- Size: Flange is 2' x 2', AP Enclosure is 18" x 18" x 2.6" deep
- Weight: 13lbs (not including access point or antenna)
- Enclosure must be supported by the building ceiling structural system, not tile gridwork.

Model 1059-MIMO Includes:

- Access point mounting screws
- (4) Suspension wires
- (2) 3/4" Trade conduit connectors for power and data cable openings in the back-box
- Mounting Instructions