



9" PLASTIC NET.MEDIA CENTER


ICRESDC9PE

ICC's new 9" Plastic Net.Media Center is designed to be installed in a residence; such as small homes, multi-unit dwellings and retrofitting existing homes and serve as the central distribution point for voice, data, audio and video connectivity. Its compact size makes it perfect for smaller types of structured cabling installations allowing it to fit in tight and confined areas. The base is designed to fit between 16" wall studs and offers a variety of mounting options. It can be installed inside the wall for a professional clean appearance, or wall mounted if the walls have already been installed and painted. ICC's 9" Plastic Net.Media Center can be configured with any ICC Net.Media Center connectivity module. Holds up to 4 mounting modules.




Package Content/Contenido

1. Enclosure 1ea.
Caja (14.25" x 9.00" x 3.625")
2. Cover 1ea.
Cubierto (15.00" x 9.40" x 1.00")
3. Installation Instructions 1ea.
Manual de instalacion
4. #10 x 1" Wood Screws 4 pieces
Tornillo de Madera
5. #6-32 x 1" Machine Screw 2 pieces
Tornillos

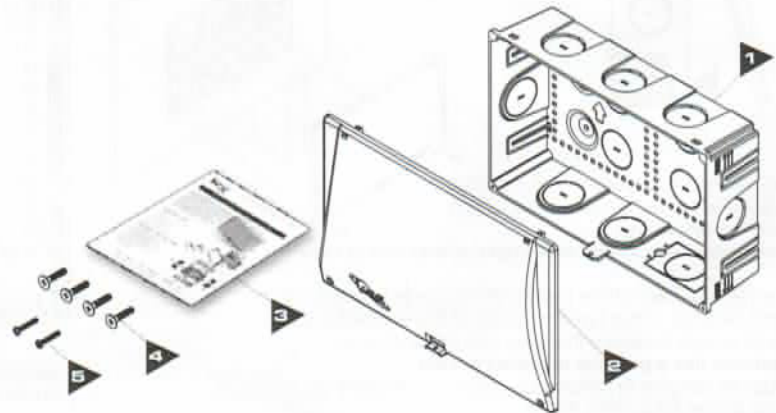

Features / Características

- A. Light-weight ABS plastic construction
Construccion de plastico ligero ABS
- B. Holds up to 4 mounting modules
Soporta hasta cuatro modulos
- C. 110 power knockout for an AC power outlet (optional)
Acepta cajas electricas de 110V
- D. 3 top, 3 bottom, 4 rear, and 2 side cable entry knockouts
Entradas y salidas para cable
- E. 4 surface screw mounts
Cuatro agujeros para montar en superficie
- F. Extendable mounting tabs
Lenguetas extensibles para montar entre postes
- G. Padlock option for additional security (padlock not included)
Opcion para candado de seguridad
- H. Dry wall markings
Marcas de guia para pared

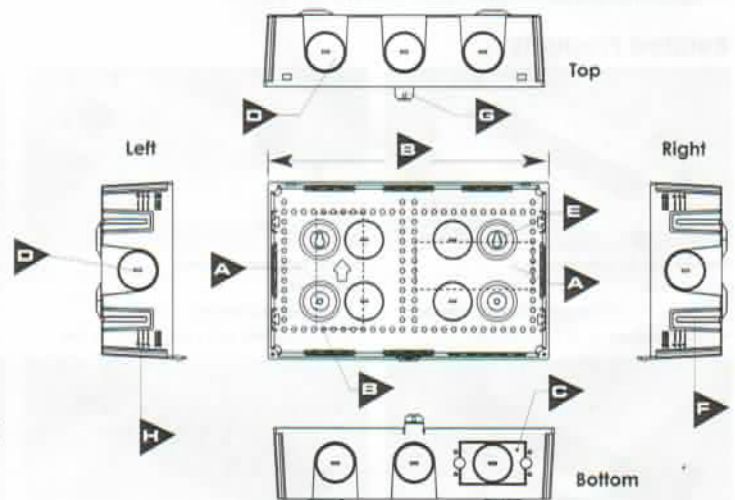


PremiumProducts | ProvenPerformance | CompetitivePrices

Call us: **888-ASK-4-ICC** | E-mail us: csr@icc.com | Go on-line: www.icc.com



Step 1: With the supplied mounting screws, install the enclosure between wall studs or surface mount.
Instalación de caja entre poste o superficies.

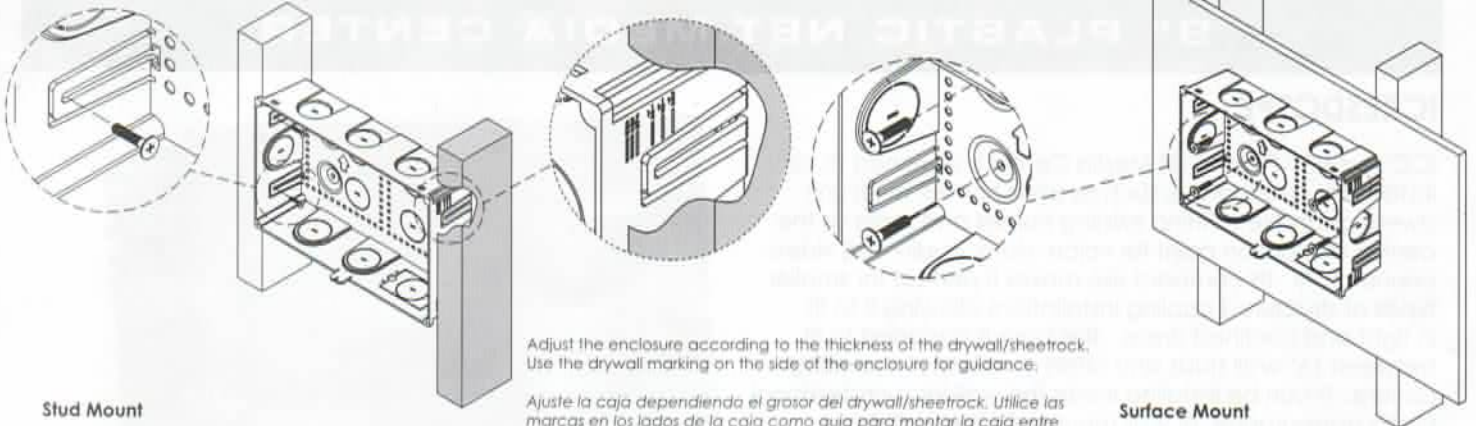


Adjust the enclosure according to the thickness of the drywall/sheetrock. Use the drywall marking on the side of the enclosure for guidance.

Ajuste la caja dependiendo el grosor del drywall/sheetrock. Utilice las marcas en los lados de la caja como guía para montar la caja entre postes y asegurar que el frente de la caja quede al nivel del drywall/sheetrock.

Stud Mount


Surface Mount

Step 2: Install the Cover
Instalación de cubierta

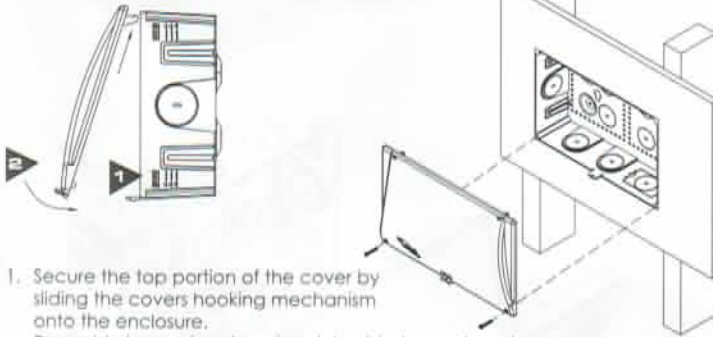

1. Secure the top portion of the cover by sliding the covers hooking mechanism onto the enclosure.
Ensamble la porción de arriba del cubierto con la caja
2. Then secure the bottom portion of the cover with the catch latch located at the bottom center of the enclosure. Install #6-32 screws to secure the door with the enclosure.
Optional: Use a padlock to restrict access.
Después asegure la porción de abajo con el cierre de la caja. Instale los tornillos #6-32.
Opcional: Use un candado para prevenir acceso.

Step 3: Install Net.Media Connectivity Modules
Instalación de módulos

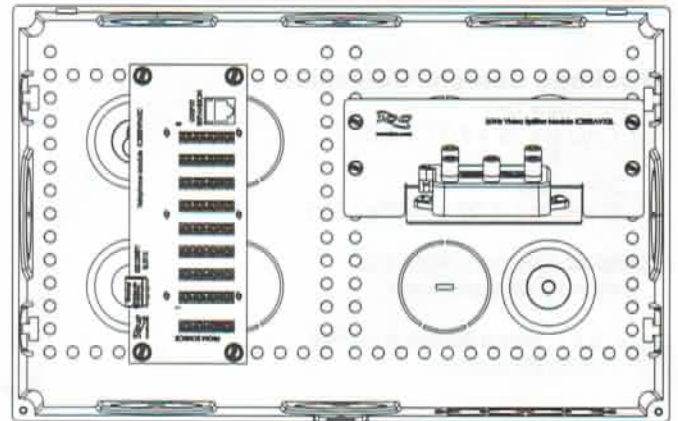

Mount modules vertically or horizontally
Monte módulos vertical o horizontal

Related Products



Premier CAT 5e Data Module
ICRESDPA1C
• Exceeds TIA CAT 5e performance standards
• 8-Port, supports up to 8 computers



Premier Telephone Module
ICRESVPA1C
• 8-Port bridged telephone with RJ-31X
• 4 incoming lines with 8 extensions per line



Premier CAT 6 Data Module
ICRESDPB1C
• Exceeds TIA CAT 6 performance standards
• 8-Port, supports up to 8 computers



Premier Video Splitter Module
ICRESAVB2C
• 1 Input x 8 outputs, supports up to 8 locations
• 2 GHz, 5-2300 MHz bandwidth



Compact CAT 5e Data Module
ICRESDPA3C
• Exceeds TIA CAT 5e performance standards
• 8-Port, supports up to 8 computers



Compact Telephone Expansion Module
ICRESVPB3C
• 8-Port bridged telephone
• For an additional 8 extensions per line



Compact CAT 6 Data Module
ICRESDPB3C
• Exceeds TIA CAT 6 performance standards
• 8-Port, supports up to 8 computers



Premier Video Splitter Module
ICRESAV42C
• 1 Input x 4 outputs, supports up to 4 locations
• 2 GHz, 5-2300 MHz bandwidth